




浙江嘉善远东滚针轴承


YUANDONG PIN-BEARING FACTORY IN JIASHAN ZHEJIANG PROVINCE

无档边滚针轴承 带内圈

NEEDLE ROLLER BEARINGS WITHOUT RETAINING EDGE AND WITH INNER RING
RNAO

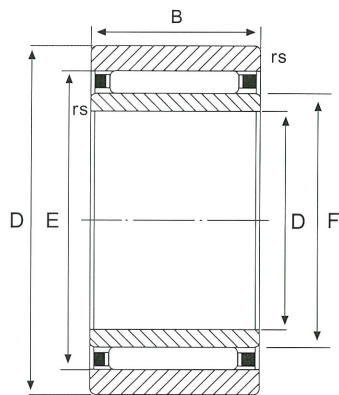

RNAO 单列 (single row)

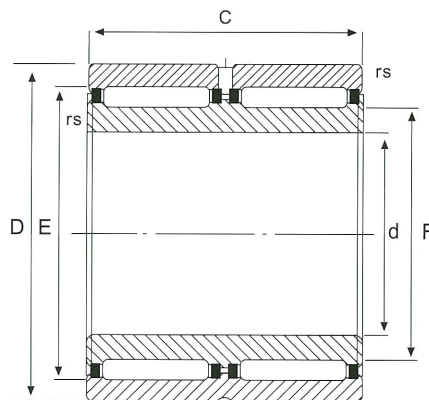

RNAO 双列 (double row)

轴径 Shaft Diameter	轴承型号 Bearing Designation	外型尺寸 Boundary Dimensions					基本额定负荷 Basic Load Ratings		极限转速 Limiting Speed n1 oil ≈ Oil min ⁻¹
		E	D1	D2	D2	Rs	动 C	静 CO	
Mm	Fw D C	Mm				Min	N		
6	NAO 6x17x10 TN	13	10.3	12.7	13.3	0.3	4750	5500	29000
9	NAO 9x22x12 TN	18	12.3	17.6	18.3	0.3	10000	9900	26000
12	NAO 12x24x13	20	16.4	19.6	20.3	0.3	8900	11800	24000
	° NAO 12x24x20	22	16.4	19.6	20.3	0.3	13300	19800	24000
	NAO 12x28x12	24	16.4	19.6	22.3	0.3	11500	12500	23000
15	NAO 15x28x13	26	20.4	23.6	24.3	0.3	9800	14300	21000
	NAO 15x32x12	26	20.4	25.6	26.5	0.3	13400	16200	21000
17	NAO 17x30x13	26	22.4	25.6	26.3	0.3	10400	15900	20000
	NAO 17x35x16	29	22.4	28.4	29.3	0.3	20000	25500	19000
20	NAO 20x35x17	29	25.6	28.4	29.3	0.3	14900	26000	18000
	NAO 20x37x18	32	25.6	31.4	32.5	0.3	21000	28000	17000
25	NAO 25x40x17	35	30.6	34.4	35.5	0.3	19600	34000	15000
	NAO 25x42x16	37	30.6	36.4	37.5	0.3	23100	33500	15000
	° NAO 25x42x32	37	30.6	36.4	37.5	0.3	39500	37000	15000
30	NAO 30x45x13	40	35.6	39.4	40.5	0.3	16200	28000	13000
	NAO 30x45x17	40	35.6	39.4	40.5	0.3	20800	38500	13000
	° NAO 30x45x26	40	35.6	39.4	40.5	0.3	27500	56000	13000
	NAO 30x47x16	42	35.6	41.4	42.5	0.3	24400	37500	13000
	NAO 30x47x18	42	35.6	41.4	42.5	0.3	27500	43000	13000
	NAO 30x52x18	44	37.6	43.4	44.5	0.3	28000	45500	12000
35	NAO 35x50x17	45	40.6	44.4	45.5	0.3	21400	41500	12000
	NAO 35x55x20	47	40.6	46.2	47.5	0.3	32500	57000	11000
	NAO 35x57x20.5	50	42.6	49.2	50.5	0.3	36000	59000	11000
40	NAO 40x55x17	50	45.69	49.2	50.5	0.3	22500	46000	10000
	NAO 40x65x20	58	50.6	57.2	58.5	0.3	35500	62000	9000
50	NAO 50x68x20	60	55.8	59.2	60.8	0.6	28500	66000	8500
	NAO 50x78x20	68	60.8	67.2	68.8	1	43500	85000	7500
70	NAO 570x100x30	88	81	87.2	89	1	72000	179000	6000
75	NAO 75x105x25	93	86	92.2	94	1	57000	136000	5500
80	NAO 80x110x30	98	91	97.2	99	1	68000	172000	5000
90	NAO 90x120x30	108	101	107.2	109	1	71000	188000	4700

Tn=塑料保险架, 允许运转温度: 120℃连续地, 150℃临时地, 180℃短时地。)对于脂润滑, 允许值为表列数值的60%。 双列

TN: plastic retainer, permissible operational temperature 120℃, 150℃ for temporary use, 180℃ for short time only) for grease lub, the permissible value should be 60% of those in the list double rows.